





MAX. ENGINE POWER: 74kW (100hp) MAX. OPERATING WEIGHT: 8774kg (19343lb) MAX. LOADER CAPACITY: 1.7m<sup>3</sup> (2.2yd<sup>3</sup>)

STATIC DIMENSIONS – Standard height arm

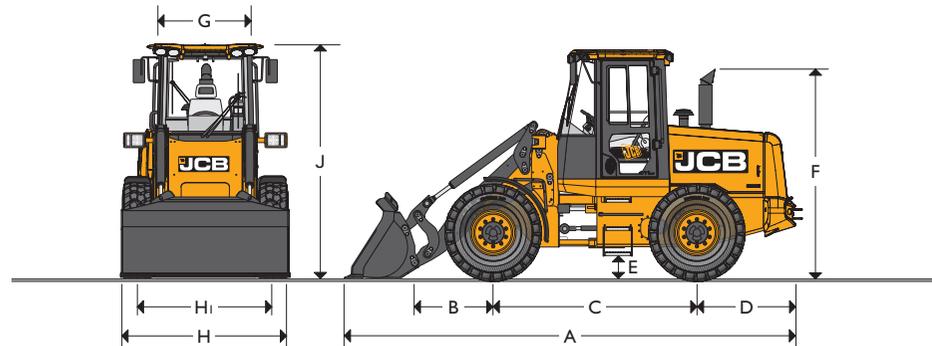

STATIC DIMENSIONS – High lift arm

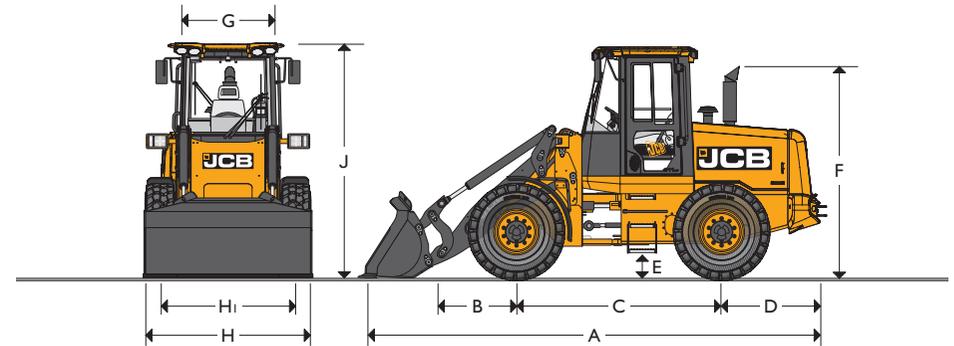

STATIC DIMENSIONS – Standard height arm

		mm (ft-in)
A	Overall length with standard shovel	5978 (19-7)
B	Axle to pivot pin	1166 (3-10)
C	Wheel base	2700 (8-10)
D	Axle to counterweight face	1375 (4-6)
E	Minimum ground clearance	410 (1-4)
F	Height over exhaust	2928 (9-7)
G	Width over cab	1515 (5-0)
H	Width over tyres	2203 (7-3)
H <sub>i</sub>	Wheel track	1800 (5-11)
J	Height over cab	3078 (10-1)
	Pin height (maximum)	3487 (11-5)
	Overall operating height	4427 (14-6)
	Front axle weight	kg (lb) 3600 (7936)
	Rear axle weight	kg (lb) 4853 (9950)
	Total weight	kg (lb) 8453 (18636)
	Inside radius	2608 (8-7)
	Maximum radius	5414 (17-9)
	Articulation angle	± 40°

Data based on machine equipped with a 1.2m<sup>3</sup>, direct mounted shovel with bolt on toeplates and Michelin 15.5R25 XHA (L3) tyres


STATIC DIMENSIONS – High lift arm

		mm (ft-in)
A	Overall length with standard shovel	6090 (20-0)
B	Axle to pivot pin	1278 (4-2)
C	Wheel base	2700 (8-10)
D	Axle to counterweight face	1375 (4-6)
E	Minimum ground clearance	410 (1-4)
F	Height over exhaust	2928 (9-7)
G	Width over cab	1515 (5-0)
H	Width over tyres	2203 (7-3)
H <sub>i</sub>	Wheel track	1800 (5-11)
J	Height over cab	3078 (10-1)
	Pin height (maximum)	3621 (11-11)
	Overall operating height	4559 (14-11)
	Front axle weight	kg (lb) 3752 (8271)
	Rear axle weight	kg (lb) 5021 (8027)
	Total weight	kg (lb) 8773 (19341)
	Inside radius	2608 (8-7)
	Maximum radius	5465 (17-11)
	Articulation angle	± 40°

Data based on machine equipped with a 1.2m<sup>3</sup>, direct mounted shovel with bolt on toeplates and Michelin 5.5R25 XHA (L3) tyres




LOADER DIMENSIONS – Standard height arm

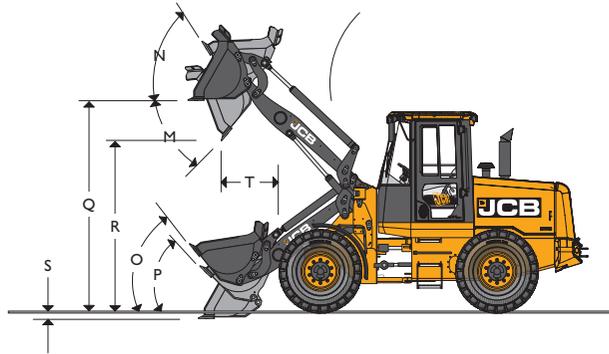

CHANGES TO OPERATING PERFORMANCE AND DIMENSIONS – Standard height arm

Tyre size	Manufacturer	Type	Rating	Op. weight kg (lb)	Tipping loads		Dimensions	
					Straight kg (lb)	Full turn kg (lb)	Vertical mm (in)	Width mm (in)
15.5 - 25 (crossply)	Goodyear	SGL D/L 12 Ply	L2	-158 (-347)	-94 (-207)	-92 (-202)	-4 (-0.157)	+7 (+0.276)
15.5 - 25 (crossply)	Goodyear	HRL D/L 12 Ply	L3	-124 (-273)	-74 (-163)	-72 (-158)	0	0
15.5R25 (radial)	Goodyear	GP - 2B	L2	0	0	0	-4 (-0.157)	+7 (+0.276)
15.5R25 (radial)	Michelin	XTLA	L2	-48 (-106)	-29 (-64)	-28 (-62)	-4 (-0.157)	+7 (+0.276)
15.5R25 (radial)	Michelin	XMINED2	L5	+436 (+961)	+263 (+580)	+254 (+560)	+42 (+1.654)	+3 (+0.118)


Assumes the machine is fitted with 1.2m<sup>3</sup> shovel with toeplates and Michelin 15.5R25 XHA (L3) tyres.

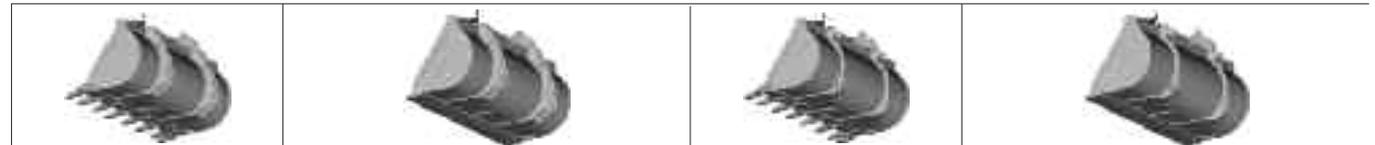

		Direct	Direct	Direct	Direct	Direct	Quickhitch	Quickhitch	Quickhitch	Quickhitch	Quickhitch
Bucket mounting		Direct	Direct	Direct	Direct	Direct	Quickhitch	Quickhitch	Quickhitch	Quickhitch	Quickhitch
Bucket type		General purpose	General purpose	General purpose	General purpose	Light material	General purpose	General purpose	General purpose	General purpose	Light material
Bucket equipment		Tipped teeth	Tipped teeth	Reversible t/plate	Reversible t/plate	Reversible t/plate	Tipped teeth	Tipped teeth	Reversible t/plate	Reversible t/plate	Reversible t/plate
Bucket capacity (SAE heaped)	m <sup>3</sup> (yd <sup>3</sup> )	1.2 (1.6)	1.4 (1.8)	1.2 (1.6)	1.4 (1.8)	1.7 (2.2)	1.2 (1.6)	1.4 (1.8)	1.2 (1.6)	1.4 (1.8)	1.7 (2.2)
Bucket capacity (struck)	m <sup>3</sup> (yd <sup>3</sup> )	1.009 (1.319)	1.180 (1.542)	1.009 (1.319)	1.180 (1.542)	1.362 (1.780)	1.009 (1.319)	1.180 (1.542)	1.009 (1.319)	1.180 (1.542)	1.362 (1.780)
Bucket width	mm (ft-in)	2250 (7-5)	2400 (7-10)	2250 (7-5)	2400 (7-10)	2400 (7-10)	2250 (7-5)	2400 (7-10)	2250 (7-5)	2400 (7-10)	2400 (7-10)
Bucket weight	kg (lb)	502 (1106)	581 (1280)	528 (1164)	603 (1329)	638 (1406)	479 (1056)	558 (1230)	505 (1113)	580 (1278)	614 (1353)
Maximum material density	kg/m <sup>3</sup> (lb/yd <sup>3</sup> )	2208 (4868)	1835 (4046)	2208 (4868)	1835 (4046)	1592 (3510)	2102 (4635)	1748 (3854)	2102 (4635)	1748 (3854)	1515 (3340)
Tipping load straight	kg (lb)	6157 (13574)	5990 (13205)	6157 (13574)	5990 (13205)	5944 (13104)	5889 (12982)	5730 (12633)	5889 (12982)	5730 (12633)	5685 (12532)
Tipping load full turn	kg (lb)	5300 (11685)	5141 (11334)	5300 (11685)	5141 (11334)	5095 (11232)	5047 (11126)	4894 (10790)	5047 (11126)	4894 (10790)	4848 (10689)
Payload	kg (lb)	2650 (5843)	2570 (5667)	2650 (5843)	2570 (5667)	2547 (5616)	2523 (5563)	2447 (5395)	2523 (5563)	2447 (5395)	2424 (5433)
Maximum break out force	kN (lbf)	73.2 (16455)	67.7 (15219)	73.2 (16455)	67.7 (15219)	62.7 (14095)	67.2 (15106)	62.3 (14005)	67.2 (15106)	62.3 (14005)	57.1 (12836)
M Dump angle maximum	degrees	50°	50°	50°	50°	50°	50°	50°	50°	50°	50°
N Roll back angle at full height	degrees	58°	58°	58°	58°	58°	58°	58°	58°	58°	58°
O Roll back at carry	degrees	49°	49°	49°	49°	49°	49°	49°	49°	49°	49°
P Roll back at ground level	degrees	42°	42°	42°	42°	42°	42°	42°	42°	42°	42°
Q Load over height	mm (ft-in)	3242 (10-7)	3242 (10-7)	3237 (10-8)	3237 (10-8)	3237 (10-8)	3259 (10-8)	3259 (10-8)	3254 (10-8)	3254 (10-8)	3254 (10-8)
R Dump height (45° dump)	mm (ft-in)	2524 (10-3)	2450 (10-0)	2624 (8-7)	2582 (8-6)	2532 (8-4)	2490 (8-2)	2426 (8-0)	2590 (8-6)	2548 (8-4)	2498 (8-2)
S Dig depth	mm (ft-in)	108 (0-4)	113 (0-4)	100 (0-4)	105 (0-4)	105 (0-4)	91 (0-4)	96 (0-4)	83 (0-3)	88 (0-3)	88 (0-3)
T Reach at dump height	mm (ft-in)	1035 (3-5)	1061 (3-6)	925 (3-0)	951 (3-1)	996 (3-3)	1084 (3-7)	1124 (3-8)	974 (3-2)	1014 (3-4)	1059 (3-6)
Reach maximum (45° dump)	mm (ft-in)	1505 (4-11)	1569 (5-2)	1395 (4-7)	1459 (4-9)	1529 (5-0)	1488 (4-5)	1475 (4-10)	1358 (4-5)	1365 (4-6)	1435 (4-8)
Operating weight (includes 80kg operator and full fuel tank)	kg (lb)	8427 (18578)	8506 (18752)	8453 (18636)	8528 (18801)	8563 (18878)	8599 (18958)	8678 (19132)	8625 (19015)	8700 (19180)	8734 (19255)



LOADER DIMENSIONS – High lift arm

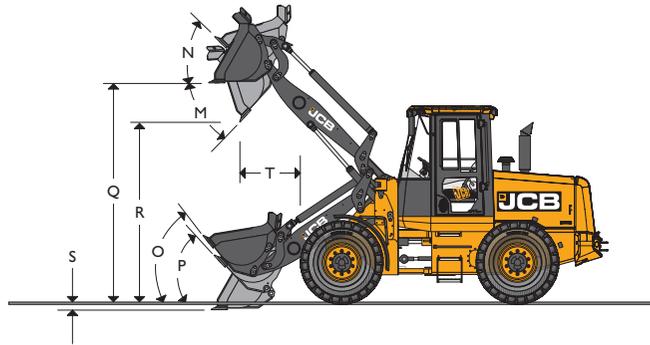

CHANGES TO OPERATING PERFORMANCE AND DIMENSIONS – High lift arm

Tyre size	Manufacturer	Type	Rating	Op. weight kg (lb)	Tipping loads		Dimensions	
					Straight kg (lb)	Full turn kg (lb)	Vertical mm (in)	Width mm (in)
15.5 - 25 (crossply)	Goodyear	SGL D/L I2 Ply	L2	-158 (-347)	-88 (-194)	-87 (-192)	-4 (-0.157)	+7 (+0.276)
15.5 - 25 (crossply)	Goodyear	HRL D/L I2 Ply	L3	-124 (-273)	-70 (-154)	-68 (-150)	0	0
15.5R25 (radial)	Goodyear	GP - 2B	L2	0	0	0	-4 (-0.157)	+7 (+0.276)
15.5R25 (radial)	Michelin	XTLA	L2	-48 (-106)	-27 (-60)	-26 (-57)	-4 (-0.157)	+7 (+0.276)
15.5R25 (radial)	Michelin	XMINED2	L5	+436 (+961)	+263 (+580)	+254 (+560)	+42 (+1.654)	+3 (+0.118)

Assumes the machine is fitted with 1.2m<sup>3</sup> shovel with toeplates and Michelin 15.5R25 XHA (L3) tyres.



		Direct	Direct	Direct	Direct	Direct	Quickhitch	Quickhitch	Quickhitch	Quickhitch	Quickhitch
Bucket mounting		Direct	Direct	Direct	Direct	Direct	Quickhitch	Quickhitch	Quickhitch	Quickhitch	Quickhitch
Bucket type		General purpose	General purpose	General purpose	General purpose	Light material	General purpose	General purpose	General purpose	General purpose	Light material
Bucket equipment		Tipped teeth	Tipped teeth	Reversible t/plate	Reversible t/plate	Reversible t/plate	Tipped teeth	Tipped teeth	Reversible t/plate	Reversible t/plate	Reversible t/plate
Bucket capacity (SAE heaped)	m <sup>3</sup> (yd <sup>3</sup> )	1.2 (1.6)	1.4 (1.8)	1.2 (1.6)	1.4 (1.8)	1.7 (2.2)	1.2 (1.6)	1.4 (1.8)	1.2 (1.6)	1.4 (1.8)	1.7 (2.2)
Bucket capacity (struck)	m <sup>3</sup> (yd <sup>3</sup> )	1.009 (1.319)	1.180 (1.542)	1.009 (1.319)	1.180 (1.542)	1.362 (1.780)	1.009 (1.319)	1.180 (1.542)	1.009 (1.319)	1.180 (1.542)	1.362 (1.780)
Bucket width	mm (ft-in)	2250 (7-5)	2400 (7-10)	2250 (7-5)	2400 (7-10)	2400 (7-10)	2250 (7-5)	2400 (7-10)	2250 (7-5)	2400 (7-10)	2400 (7-10)
Bucket weight	kg (lb)	502 (1106)	581 (1280)	528 (1164)	603 (1329)	638 (1406)	479 (1056)	558 (1230)	505 (1113)	580 (1278)	614 (1353)
Maximum material density	kg/m <sup>3</sup> (lb/yd <sup>3</sup> )	2090 (4607)	1738 (3831)	2090 (4607)	1738 (3831)	1418 (3125)	1990 (4387)	1654 (3646)	1990 (4387)	1654 (3646)	1349 (2974)
Tipping load straight	kg (lb)	5830 (12853)	5672 (12504)	5830 (12853)	5672 (12504)	5628 (12408)	5577 (12295)	5426 (11963)	5577 (12295)	5426 (11963)	5383 (11867)
Tipping load full turn	kg (lb)	5017 (11061)	4866 (10727)	5017 (11061)	4866 (10727)	4822 (10631)	4777 (10532)	4633 (10213)	4777 (10532)	4633 (10213)	4589 (10117)
Payload	kg (lb)	2508 (5530)	2433 (5363)	2508 (5530)	2433 (5363)	2411 (5315)	2389 (5266)	2316 (5107)	2389 (5266)	2316 (5107)	2295 (5059)
Maximum break out force	kN (lbf)	73.2 (16455)	67.7 (15219)	73.2 (16455)	67.7 (15219)	62.7 (14095)	67.2 (15106)	62.3 (14005)	67.2 (15106)	62.3 (14005)	57.1 (12836)
<b>M</b> Dump angle maximum	degrees	47.5°	47.5°	47.5°	47.5°	47.5°	47.5°	47.5°	47.5°	47.5°	47.5°
<b>N</b> Roll back angle at full height	degrees	44°	44°	44°	44°	44°	44°	44°	44°	44°	44°
<b>O</b> Roll back at carry	degrees	48.5°	48.5°	48.5°	48.5°	48.5°	48.5°	48.5°	48.5°	48.5°	48.5°
<b>P</b> Roll back at ground level	degrees	44°	44°	44°	44°	44°	44°	44°	44°	44°	44°
<b>Q</b> Load over height	mm (ft-in)	3371 (11-1)	3376 (11-1)	3371 (11-1)	3371 (11-1)	3371 (11-1)	3393 (11-2)	3393 (11-2)	3388 (11-1)	3388 (11-1)	3388 (11-1)
<b>R</b> Dump height (45° dump)	mm (ft-in)	2658 (8-9)	2594 (8-6)	2758 (9-1)	2716 (8-11)	2666 (8-9)	2624 (8-7)	2560 (8-5)	2724 (8-11)	2682 (8-10)	2632 (8-8)
<b>S</b> Dig depth	mm (ft-in)	111 (0-4)	116 (0-5)	103 (0-4)	108 (0-4)	108 (0-4)	94 (0-4)	99 (0-4)	86 (0-3)	91 (0-4)	91 (0-4)
<b>T</b> Reach at dump height	mm (ft-in)	1069 (3-6)	195 (3-7)	959 (3-2)	985 (3-3)	1030 (3-5)	1118 (3-8)	1158 (3-10)	1008 (3-3)	1048 (3-5)	1093 (3-7)
Reach maximum (45° dump)	mm (ft-in)	1810 (5-11)	1874 (6-2)	1700 (5-7)	1764 (5-9)	1834 (6-0)	1793 (5-11)	1780 (5-10)	1663 (5-5)	1670 (5-7)	1740 (5-9)
Operating weight (includes 80kg operator and full fuel tank)	kg (lb)	8707 (19196)	8786 (19370)	8733 (19253)	8808 (19418)	8843 (19495)	8879 (19575)	8958 (19749)	8905 (19632)	8980 (19797)	9014 (19872)



### LOADER

Widely spaced four ram parallel geometry provides the combination of excellent visibility with high bucket torque characteristics throughout the working arc. Specification includes automatic bucket reset and lift arm kickout mechanisms. The pin, bush and sealing design on all pivot points provide extended maintenance intervals. Optional smooth ride system (SRS) reduces machine bounce on load/carry operations. Optional High Lift Loader specifically designed for optimum load over height.

### ENGINE

4-cylinder wastegated turbo-charged, liquid cooled, mechanical direct injection diesel. Air-to-air charge cooling, independent water pump and fan drives ensure maximum cooling efficiency and "clean-burn" combustion chamber provides minimum fuel consumption. A remote sump oil drain facility simplifies servicing.

Type	Diesel 4 Stroke	
Make	JCB Dieselmax T3 TCA	
Capacity	litres (in <sup>3</sup> )	4.4 (269)
Bore	mm (in)	103 (4.06)
Stroke	mm (in)	132 (5.2)
Aspiration	Turbocharged	
Cylinders	4	
Max gross power to SAE J1995/ISO 14396	kW (hp) @ 2200rpm	74.2 (100)
Nett power to SAE J1349/EEC 80/1269	kW (hp) @ 2200rpm	69.2 (92.8)
Max torque	Nm (lb.ft) @ 1300rpm	440 (325)

#### Emissions:-

Complies with EPA Tier 3 – EU Stage 3A engine emission legislation.

### TRANSMISSION

4 wheel drive, automatic smooth shift transmission electrically operated selector and gear change incorporating a speed inhibitor and modulation for smooth, responsive on-the-move direction and ratio changes. Single stage integral torque converter 4 forward and 3 reverse gears.

Type	Smooth shift powershift	
Make & model	ZF 4WG115	
Torque converter stall ratio	3.057 : 1	
1st gear	kph (mph)	5.36 (3.33)
2nd gear	kph (mph)	12.47 (7.75)
3rd gear	kph (mph)	27.5 (17.09)
4th gear (forward only)	kph (mph)	37.5 (23.30)

### AXLES

Type	Epicyclic hub reduction
Make & model	JCB PD70 Front & Rear
Overall axle ratio	18.16 : 1
Rear axle oscillation	12.5°

### STEERING

Priority steer hydraulic system with emergency steering. Piston pump meters flow through steer valve @ 175 bar (2538 lb/in<sup>2</sup>) to provide smooth low effort response. Steering angle ± 40°. Steer rams located high in the chassis fabrication to provide protection from damage. Adjustable steering column.

### BRAKES

Hydraulic power assisted braking on all wheels. Dual circuit with accumulator back-up provide maximum safety under all conditions. Organic brake linings are environmentally acceptable. Parking brake, mechanical disc type operating on transmission output shaft.

### TYRES

A variety of tyre options are available including:

15.5 x 25 x 12 ply (L2). 15.5 x 25 x 12 ply (L3). 15.5R25 XTLA (L2). 15.5R25 GP2B (L2). 15.5R25 XHA (L2).

### LOADER HYDRAULICS

Double gear pump with automatic unloader giving combination of speed and power on demand making efficient and economic use of available engine power. Main services are servo actuated from a single lever loader control. Accumulator back-up is available to control loader in the event of loss of pump pressure.

Pump type	Double gear pump	
Pump 1 max. flow	l/min (UK gal/min)	50.6 (11)
Pump 1 max. pressure	bar (lb/in <sup>2</sup> )	220 (3190)
Pump 2 max. flow	l/min (UK gal/min)	72.6 (16)
Pump 2 max. pressure	bar (lb/in <sup>2</sup> )	170 (2465)
<b>Hydraulic cycle times at full engine revs</b>		<b>seconds</b>
Arms raise (full bucket)		5.0
Bucket dump (full bucket)		1.1
Arms lower (empty bucket)		3.7
Total cycle		9.8

Ram dimensions	Bore	Rod	Closed centres	Stroke	
Bucket ram x2	mm (in)	80 (3.1)	50 (2)	1502 (59.1)	928 (36.5)
Lift ram x2	mm (in)	90 (3.5)	50 (2)	1107 (43.6)	743 (29.3)
Steer ram x2	mm (in)	60 (2.4)	30 (1.2)	621 (24.4)	312 (12.3)



## ELECTRICAL SYSTEM

24 volt negative ground system, 55 Amp alternator with 2 x 110 Amp hour low maintenance batteries. Isolator located in rear of machine. Ignition key start/stop and pre-heat cold start. Primary fuse box. Other electrical equipment includes quartz halogen, twin filament working lights, front/rear wash/wipe, heated rear screen, full road going lights, clock, gauge and warning light monitoring. Connectors to IP67 standard.

System voltage	Volt	24
Alternator output	Amp hour	55
Battery capacity	Amp hour	2 x 110

## CAB

Resiliently mounted ROPS/FOPS structure (tested in accordance with ISO 3471-1 : 1986 / ISO 3449 : 1984). De-luxe operator environment combines ergonomically located controls with a high level of appointment and low internal noise levels. Entry/exit is via large rear hinged door and anti-slip steps. Excellent forward visibility is provided by a 3 section curved, laminated windscreen and low waistline. Extensive instrumentation includes electronic monitoring panel and display (EMS). Heating / ventilation provides balanced and filtered air distribution throughout the cab via a powerful 11 kW capacity heater. The unitary construction allows easy sealing and prevents ingress of dust. A transmission lock on the selector prevents inadvertent engagement and the loader controls can be isolated for safe road travel.

## ATTACHMENTS

An extensive range of attachments including pallet forks, crane jibs, high dumping buckets and timber grapples are available to fit directly or via the JCB quickhitch mounting.

## SERVICE FILL CAPACITIES

	litres (UK gal)
Hydraulic system	110 (24.2)
Fuel tank	125 (27.5)
Engine oil sump	10.7 (2.2)
Transmission oil system	27 (5.94)
Axle oil (front)	25 (5.5)
Axle oil (rear)	25 (5.5)
Engine coolant system	21.5 (4.7)

## STANDARD EQUIPMENT

**Loader:** Bucket reset mechanism, loader arm kickout mechanism, loader control isolator, single lever servo control, high torque true parallel lift geometry combines with excellent visibility between the arms.

**Engine:** Air cleaner – 3 stage dry type – cyclonic with primary and safety elements, autotensioner, cold start advance, fuel filters, fan guards.

**Transmission:** Single lever shift control, speed inhibitor, neutral start, disconnect on footbrake and loader lever, disconnect isolator switch, direction changes and kickdown on gear selector and loader control lever, air blast transmission cooler.

**Axles:** Epicyclic wheel hub reduction, fixed front, oscillating rear.

**Brakes:** Multi-plate wet disc brakes, organic linings, dual circuit hydraulic power assisted. Parking disc brake on transmission output shaft.

**Hydraulics:** Double gear pump with priority steer, emergency steer back-up, 2 spool loader circuit with accumulator support, 3rd spool auxiliary hydraulic circuit as standard. Hydraulic tank located in the rear chassis fabrication. Air blast cooler.

**Steering:** Adjustable steering column, "soft feel" steering wheel 5 turns lock to lock, resilient stops on max lock.


**Cab:** ROPS/FOPS safety structure, ashtray, interior reading light, centre mounted master warning light. Electronic monitoring panel with LCD message display. Two speed intermittent front windscreen wipe/wash and self park, single speed rear windscreen wipe/wash and self park. 3 speed heater/demisting with replaceable air filter, LH and RH opening windows, sun blind, internal rear view mirror, heated external mirrors, adjustable suspension seat with belt and headrest, operator storage facilities, laminated windscreen, heated rear screen, loader control isolator; horn.

**Electrical:** Road lights front and rear, parking lights, front and rear working lights, reverse alarm and light, rear fog light, battery isolator, radio wiring and speakers, 55 amp alternator, rotating beacon.

**Bodywork:** Front fenders, side and rear access panels, flexible bottom step, full width rear counterweight, recovery hitch, lifting lugs.

## OPTIONAL EQUIPMENT


Auxiliary 4th spool hydraulic service, air conditioning, limited slip differentials front/rear axles, additional counterweight, turbo 2 pre-cleaner, visibowl pre-cleaner, tooth guard, replaceable bucket wearparts, epoxy coated radiator/coolers, stainless steel brake pipes, smooth ride system (SRS), engine grid heater, transmission cooler bypass, belly guards, hydraulic quickhitch, rear fenders, super high lift arms, reversing camera (colour), auto greasing system, auxiliary control buttons on joystick, 24V to 12V in cab converter, cab screen guards, additional front and rear cab mounted work lights, air suspension seat, sun visor, fire extinguisher, number plate light kit, grease gun, LiveLink telematics.

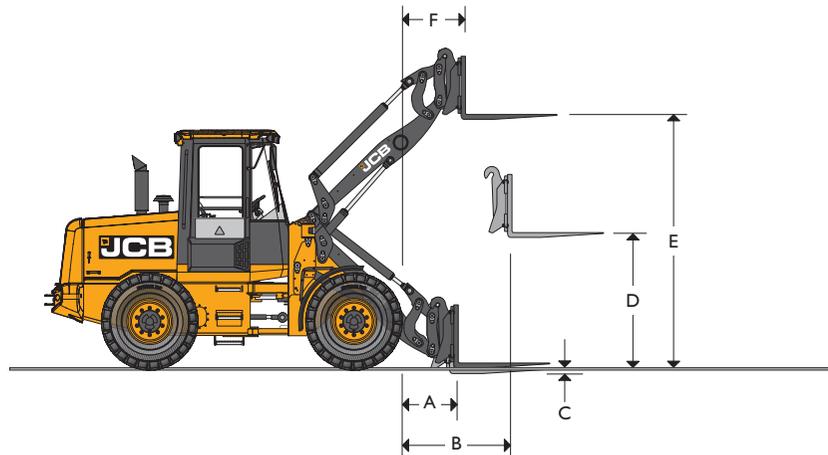

**LOADER DIMENSIONS – FORK FRAME WITH FORKS**

Assumes Michelin 15.5R25 XHA L3 tyres		Parallel fork	Roll back fork
Fork carriage width	mm (ft-in)	1500 (4-11)	1500 (4-11)
Length of tines	mm (ft-in)	1220 (4-0)	1220 (4-0)
<b>A</b> Reach at ground level	mm (ft-in)	662 (2-2)	669 (2-2)
<b>B</b> Reach at arms horizontal	mm (ft-in)	1425 (4-8)	1432 (4-8)
<b>C</b> Below ground level	mm (ft-in)	17 (0-1)	27 (0-1)
<b>D</b> Arms, horizontal height	mm (ft-in)	1728 (5-8)	1718 (5-8)
<b>E</b> Arms, maximum height	mm (ft-in)	3320 (10-11)	3310 (10-10)
<b>F</b> Reach at maximum height	mm (ft-in)	813 (2-8)	820 (2-8)
Payload**	kg (lb)	2868 (6322)	2868 (6322)
Tipping load straight	kg (lb)	4324 (9533)	4324 (9533)
Tipping load full turn (40°)	kg (lb)	3708 (8175)	3708 (8175)
Attachment weight	kg (lb)	440 (970)	440 (970)

\*\*At the centre-of-gravity distance 500mm (1ft-8in). Based on 80% of full turn tipping load as defined by ISO 8313. Manual fork spacings at 50mm increments. Fork section 100mm x 50mm (4in. x 2in.).

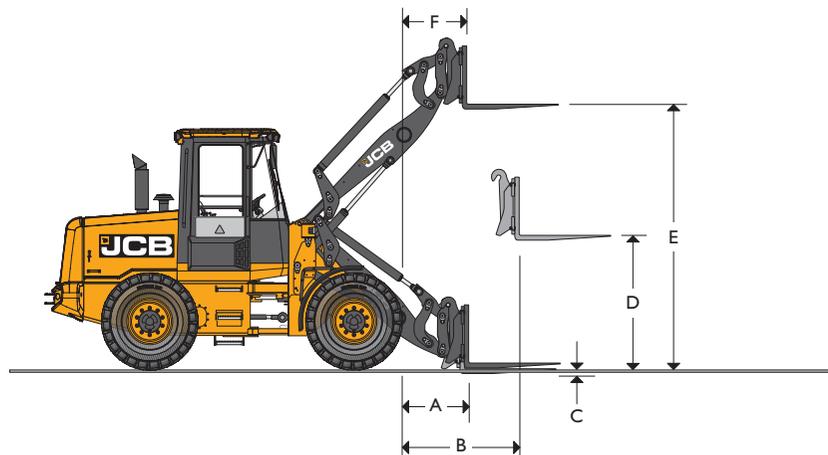


**HIGH LIFT LOADER DIMENSIONS – FORK FRAME WITH FORKS**

Assumes Michelin 15.5R25 XHA L3 tyres		Parallel fork	Roll back fork
Fork carriage width	mm (ft-in)	1500 (4-11)	1500 (4-11)
Length of tines	mm (ft-in)	1220 (4-0)	1220 (4-0)
<b>A</b> Reach at ground level	mm (ft-in)	801 (2-8)	808 (2-8)
<b>B</b> Reach at arms horizontal	mm (ft-in)	1521 (5-0)	1528 (5-0)
<b>C</b> Below ground level	mm (ft-in)	17 (0-1)	27 (0-1)
<b>D</b> Arms, horizontal height	mm (ft-in)	1728 (5-8)	1718 (5-8)
<b>E</b> Arms, maximum height	mm (ft-in)	3459 (11-4)	3449 (11-4)
<b>F</b> Reach at maximum height	mm (ft-in)	815 (2-8)	822 (2-8)
Payload**	kg (lb)	2808 (6190)	2808 (6190)
Tipping load straight	kg (lb)	4095 (9027)	4095 (9027)
Tipping load full turn (40°)	kg (lb)	3510 (7738)	3510 (7738)
Attachment weight	kg (lb)	440 (970)	440 (970)

\*\*At the centre-of-gravity distance 500mm (1ft-8in). Based on 80% of full turn tipping load as defined by ISO 8313. Manual fork spacings at 50mm increments. Fork section 100mm x 50mm (4in. x 2in.).



BUCKET SELECTOR

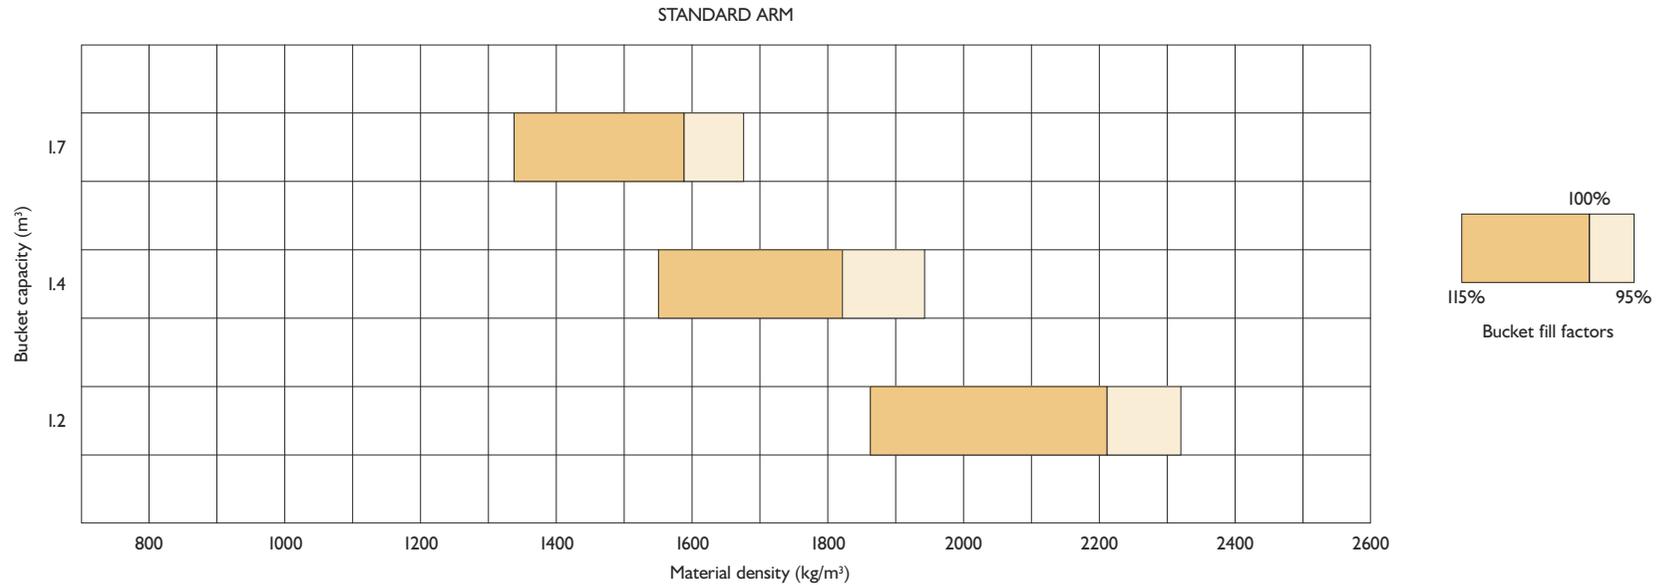

BUCKET SELECTOR

Material	Loose density		Fill factor
	kg/m <sup>3</sup>	lb/yd <sup>3</sup>	%
Snow (fresh)	200	337	110
Peat (dry)	400	674	100
Sugar beet	530	894	100
Coke (loose)	570	961	85
Barley	600	1012	85
Petroleum coke	680	1146	85
Wheat	730	1231	85
Coal bituminous	765	1290	100
Fertiliser (mixed)	1030	1737	85
Coal anthracite	1046	1764	100
Earth (dry) (loose)	1150	1939	100
Nitrate fertiliser	1250	2180	85

Material	Loose density		Fill factor
	kg/m <sup>3</sup>	lb/yd <sup>3</sup>	%
Sodium chloride (dry) (salt)	1300	2192	85
Cement Portland	1440	2428	100
Limestone (crushed)	1530	2580	100
Sand (dry)	1550	2613	100
Asphalt	1600	2698	100
Gravel (dry)	1650	2782	85
Clay (wet)	1680	2832	110
Sand (wet)	1890	3187	110
Fire clay	2080	3507	100
Copper (concentrate)	2300	3878	85
Slate	2800	4721	100
Magnetite	3204	5402	100

## A GLOBAL COMMITMENT TO QUALITY

JCB's total commitment to its products and customers has helped it grow from a one-man business into Britain's largest privately owned manufacturer of backhoe loaders, crawler excavators, wheeled excavators, telescopic handlers, wheeled loaders, dump trucks, rough terrain fork lifts, industrial fork lifts, mini/midi excavators, skid steer loaders, tractors and compaction equipment.

By making constant and massive investments in the latest production technology, the JCB factories have become some of the most advanced in the world.

By leading the field in innovative research and design, extensive testing and stringent quality control, JCB machines have become renowned all over the world for performance, value and reliability.

And with a global sales and service network of more than 650 dealers and agents, we aim to deliver the best customer support in the industry.

Through setting the standards by which others are judged, JCB has become one of the world's most impressive success stories.

